



# HASTY PROTECTIVE ROW MINEFIELD RECORD

For use of this form, see FM 20-32; the proponent agency is TRADOC.

Azimuth Block



- \_\_\_\_\_ m
- \_\_\_\_\_ m
- \_\_\_\_\_ m
- \_\_\_\_\_ m
- 0 m
- \_\_\_\_\_ m
- \_\_\_\_\_ m
- \_\_\_\_\_ m
- \_\_\_\_\_ m

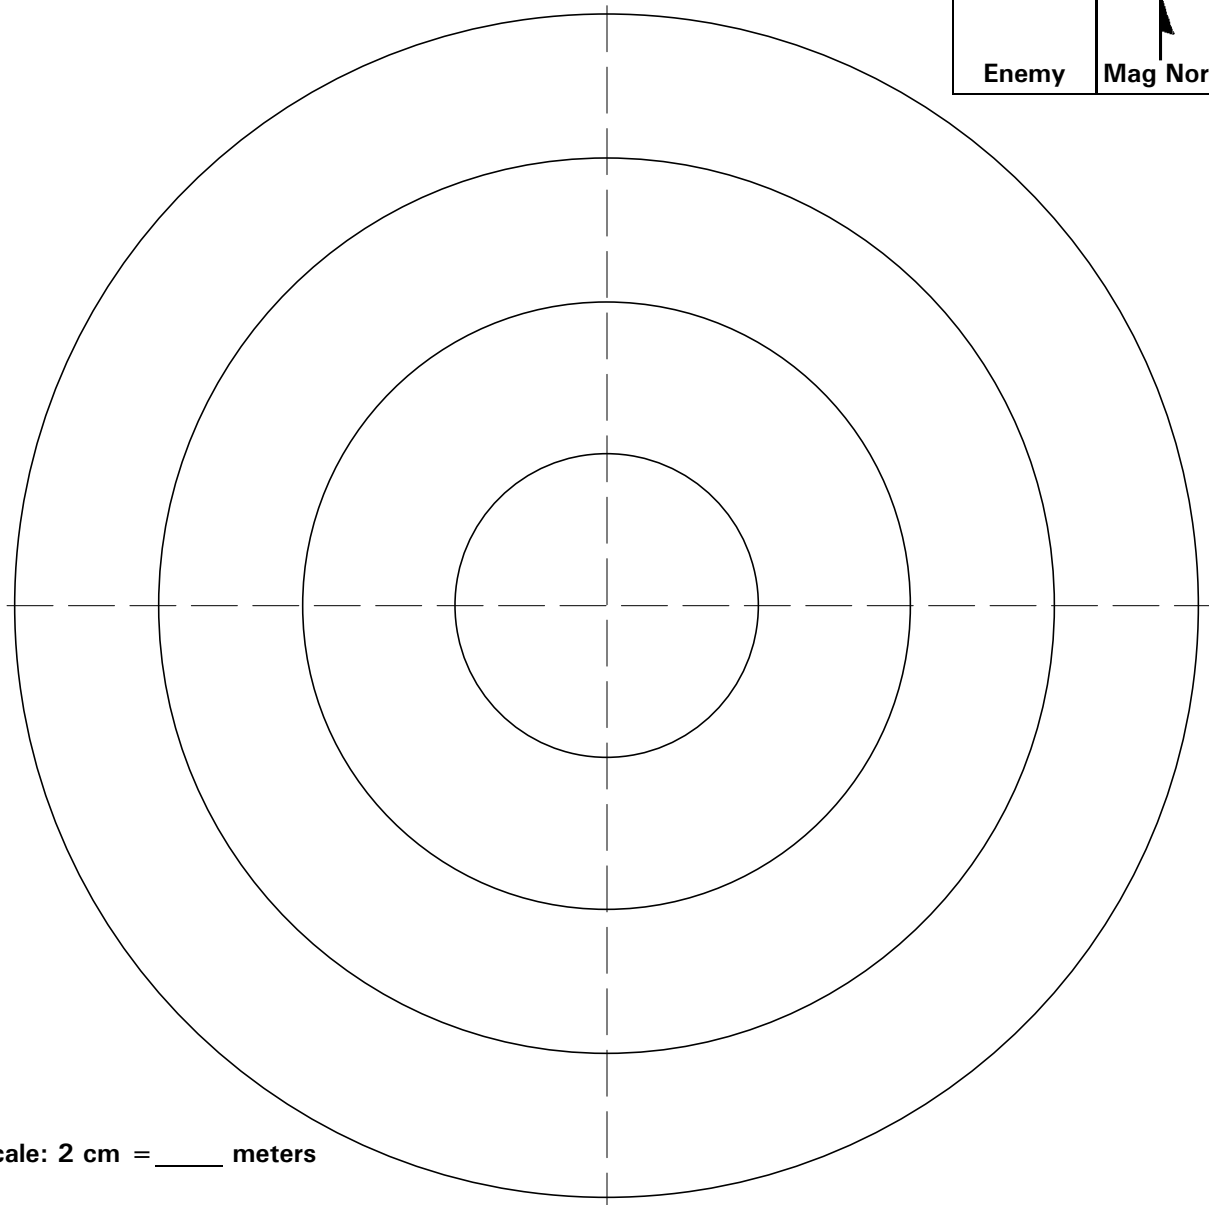

Scale: 2 cm = \_\_\_\_\_ meters

Tabular Block

Row	Type	Actuation	Mine Number
Remarks			

Identification Block

Unit	
Reference Point	
Remarks	
Map and Sheet No.	
Name of OIC	
Signature	Time and Date
Mines Removed	
Mines Transferred	


# HASTY PROTECTIVE ROW MINEFIELD RECORD

For use of this form, see FM 20-32; the proponent agency is TRADOC.

## INSTRUCTIONS

(all measurements will be in meters)

1. Designate an easily identifiable reference point on the ground (tree, stump, stake). Orient the form (the blank form on the reverse) by tying in the center point of circles to the designated reference point on the ground.
2. Tie in the reference point to a landmark (road junction, house corner) that can be found on a standard military map.
3. Complete the azimuth block.
4. Complete the following information in the identification block: unit, reference point, remarks, map, sheet number, OIC, name, and SSN.
5. Starting from the reference point, record the magnetic azimuth in degrees (°) and the distance in meters (m) of each leg from the friendly position, toward the enemy position, and from right to left or left to right across each row of mines. All rows must be recorded in the same direction. Row start points must be marked A1, B1, and so forth, and row end points must be marked A2, B2, and so forth, as shown in the sample. Spacing between rows will be no closer than 8 meters for antitank mines or 15 meters for antipersonnel mines in the row. Each mine in each row will be numbered sequentially, from the starting point to the last mine in the row. The spacing from the start row marker to the first mine will be the distance between each mine in that row. Spacing of mines will be no closer than 4 meters between mines.
6. Fill in tabular block (see sample).
7. Fill in the scale being used in the space provided. Fill in the meter readings in the right margin.
8. Ensure the security of all minefield reports (intention, initiation, completion, transfer, and change).
9. Note what has been used to identify A1 and B1, such as steel picket flush with ground or fence post wrapped with engineer tape.

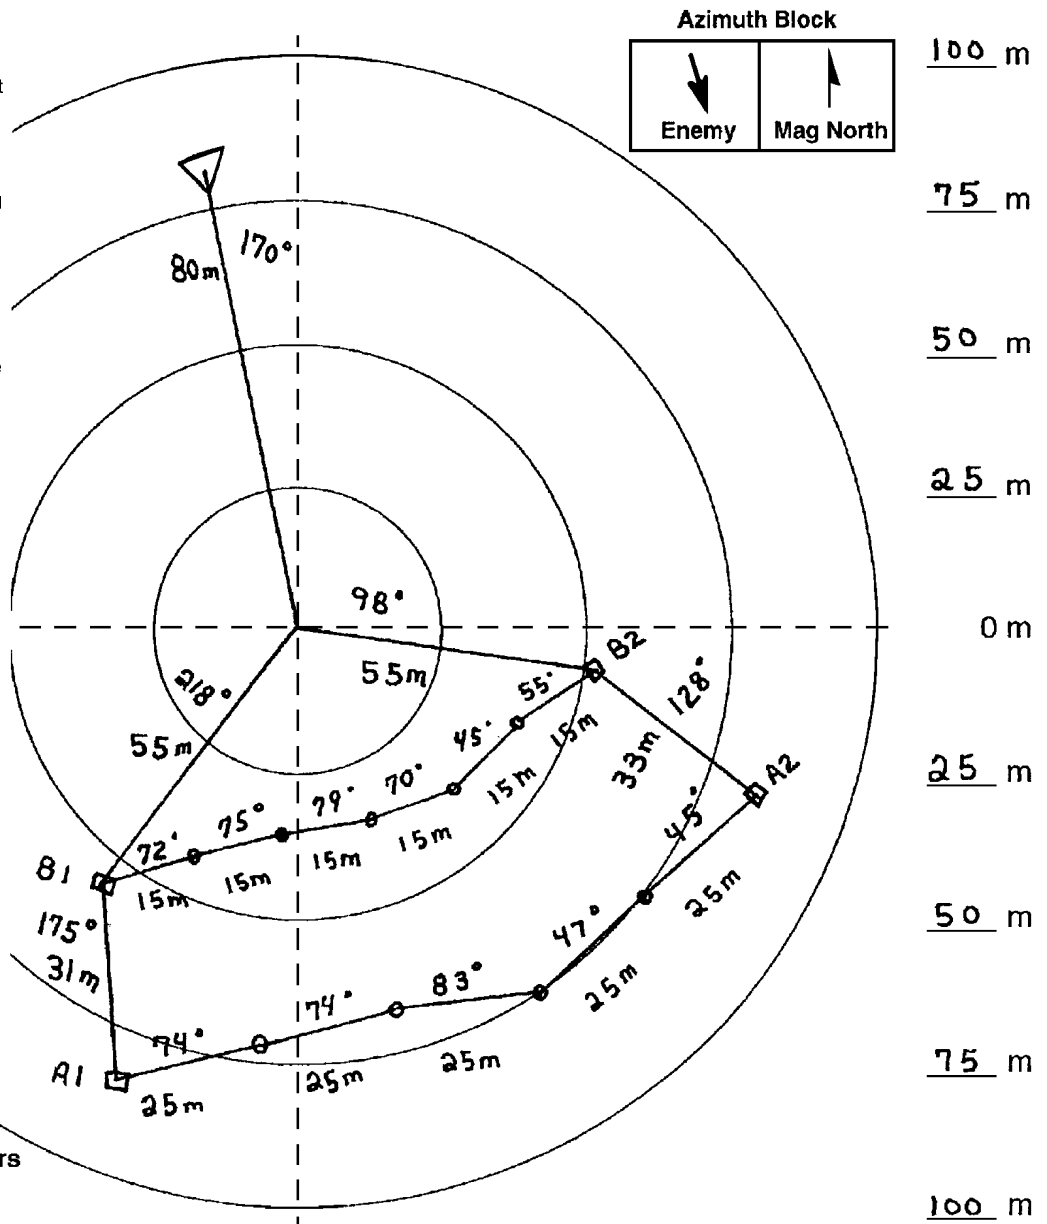

Tabular Block

Row	Type	Actuation	Mine Number
A	M-15	Pressure	1, 4
A	M-21	Tilt-Rod	2, 3
B	M-15	Pressure	1, 3, 5
B	M-15	Tilt-Rod	2, 4
Remarks: Points: A1, A2, B1, B2 are marked with orange tent pegs flush to the ground.			

Identification Block

Unit 2nd PLT. C. Co. 317 <sup>th</sup> Eng. BN.	
Reference Point Tree stump right side of the road w/white eng. tape at NA 14503505	
Remarks Landmark: Center of road junction at NA 13403409	
Map and Sheet No. Talbot # 5568	
Name of OIC 2nd LT. Roy Bean 123-45-7611	
Signature <i>Roy Bean</i>	Time and Date 140021 JUL 01
Mines Removed	
Mines Transferred	